





- Developed specifically for AdBlue®
- Adjustable outlet (120°) for optimal pulling angle
- Can be mounted in any position on a wall, ceiling or floor
- Easily adjustable spring tension

The hose reel is developed specifically for AdBlue® and is intended for industrial use.

Its robust construction ensures a safe and maintenance free use in all types of applications where you want a rational hose handling of AdBlue®.

A pivoting wall bracket is available as supplement. >>>

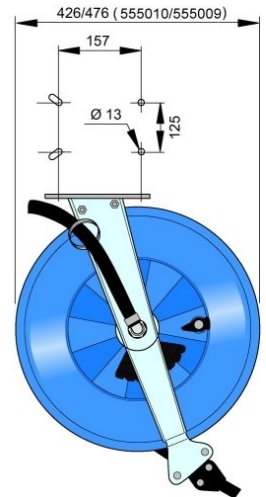

Why hose reels?

For anyone using hoses in their daily activities it is natural to use hose reels. The immediate gains from extended hose lifetime, increased efficiency, more rational handling and increased safety, outweigh manifold the investment that a hose reel involves.

The hose is always available and is never in the way. Hose free floors reduce the risk of slipping and tripping accidents, and simplify the cleaning process.

Technical data

Article no.:	555009 (12 m)	Temperature range:	-10 - 55°C
	555010 (6 m)	Pivoting wall bracket:	30372408
Hose:	EPDM	Conn. distribution hose	G¾" (f 60°)
Weight:	12-18 kg incl.hose	Conn. connection hose	G¾" (f 60°)
Max working pressure:	1.2 MPa	Conn. inlet swivel	G½" (m 60°)

Please contact IDENTIC at +46-8-511 781 05 for more information!

